



Radiator colour: Caramel Quartz

The Zehnder Fare Tech electric radiator combines beauty and brains. As an attractive heating solution for the living space of new builds and refurbishment projects, it can be used perfectly as a supplement to other heating systems or as an independent heating system – for example in low-energy new builds with a very low heating requirement and in conjunction with comfortable indoor ventilation. It stands out with its unique appearance through the elegantly curved front panel, which consists of particularly thermally conductive and corrosion-resistant aluminium to provide responsive, flexible heating comfort.

- Smart handling
- Manufactured from aluminium
- Aluminium elements, L = 76 mm
- Standard colour in RAL 9010 (Pure White)
- H bracket with integral spirit level included

Electric operation


- Radiator filled with heat transfer liquid
- With integrated electric heating element
- Integrated control panel with LCD display
- Open window detection
- With plug, appliance class II
- Protection class IP34
- Supply voltage: 230 V



Smart handling

The control panel is designed as an integral part of the radiator: it is simple to operate using plus and minus keys and temperature and energy consumption are easy to read.


- Three predefined heating programs
- Control panel can be locked for security
- Operation as needed with energy consumption indicator

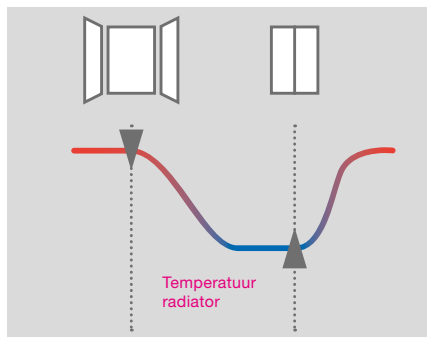

Open window detection

The integral control unit recognises if a window has been opened for an extended period and switches the radiator off. Once the window is closed, the radiator returns to normal operation.

- External temperature sensor recognises temperature changes.
- Integral thermostat reacts to sensor information.
- Radiator automatically switches off if a window is open for an extended period.
- Intelligent heating that saves energy and costs.

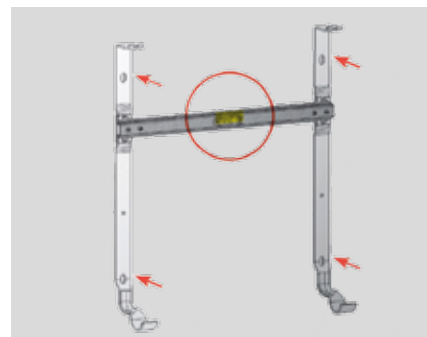


H bracket

Practical installation: The H bracket with integral spirit level makes it easy to mount the radiator level on the wall.

- Integral spirit level guarantees precise, level installation
- Designed for practical installation
- Perfect appearance: Radiator mounts close to the wall, H bracket is painted the same colour as the radiator

Overview of models


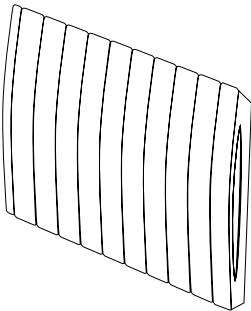


Electric operation

Model	H mm	L mm	Electric rating Watt	M kg
TAD-057-040/P	575	409	300	9
TAD-057-041/P	575	409	500	9
TAD-057-048/P	575	489	750	11
TAD-057-064/P	575	649	1000	14
TAD-057-080/P	575	809	1250	17
TAD-057-088/P	575	889	1500	18
TAD-057-120/P	575	1209	1750	24
TAD-057-128/P	575	1289	2000	26

Technology

Wall mounting

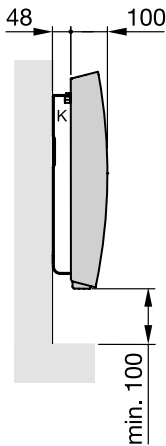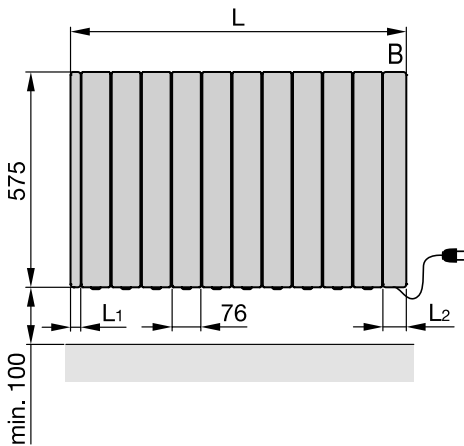

- L = Length
- L₁ = Length left side cover = 27 mm
- L₂ = Length right side cover = 62 mm
- B = Control panel

Dimensions in mm